



# 落ち蓋式U形側溝（道路側溝）

JIS規格

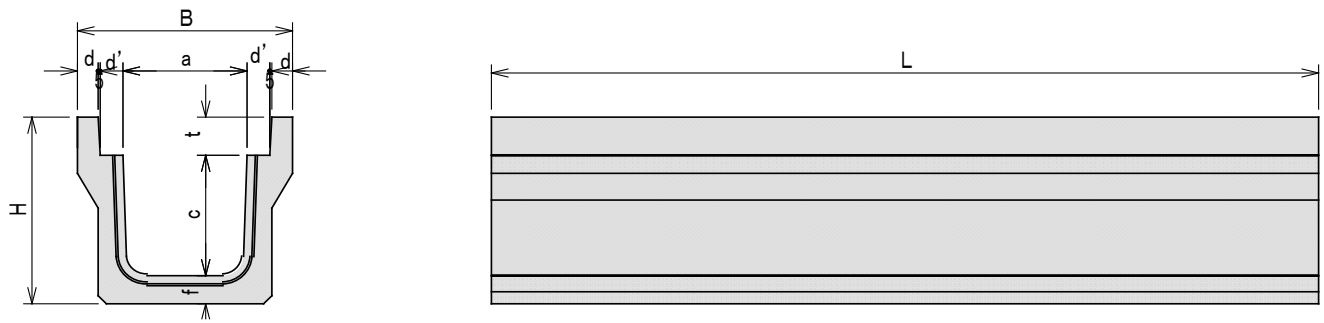

## ■寸法・重量 PU-2・PU-3

呼び名	寸法									参考重量 (kg)	
	B	a	c	d	d'	f	t	H	L		
1種	250	450	250	250	40	55	55	55		2000 又は 1000	289
	300A	500	300	300	40	55	60	60			348
	300B	500	300	400	40	55	65	65			422
	300C	500	300	500	40	55	70	70			501
	400A	600	400	400	40	55	65	65			459
	400B	600	400	500	40	55	70	70			541
	500A	720	500	500	45	60	70	70			602
	500B	720	500	600	45	60	75	75			693
3種	250	460	250	250	45	55	65	65		327	
	300A	520	300	300	50	55	70	70		410	
	300B	520	300	400	50	55	70	70		461	
	300C	520	300	500	50	55	80	80		617	
	400A	630	400	400	55	55	70	70		504	
	400B	630	400	500	55	55	80	80		620	
	500A	750	500	500	60	60	90	90		685	
	500B	750	500	600	60	60	90	90		828	

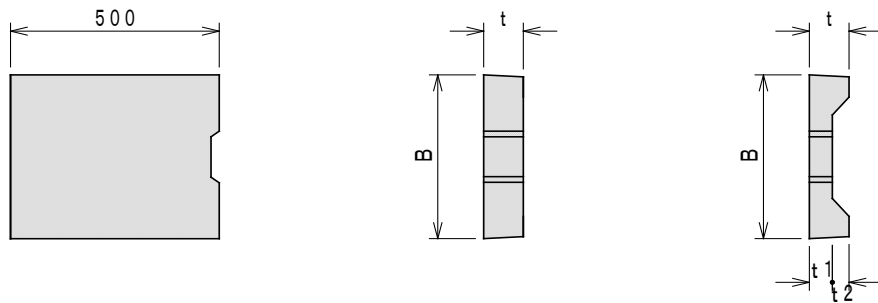


## ■寸法・重量 PC-3・PC-4

呼び名	寸法					参考重量 (kg)
	B	t	t1	t2		
1種	250	362	90	55	35	27
	300	412	95	55	40	33
	400	512	110	65	45	47
	500	622	125	75	50	65
3種	250	362	90	-	-	37
	300	412	95	-	-	45
	400	512	110	-	-	66
	500	622	125	-	-	91



ボルト固定式製品 ボルト固定式嵩上げグレーチング

断面図



平面図

