


RC床版（横断用）

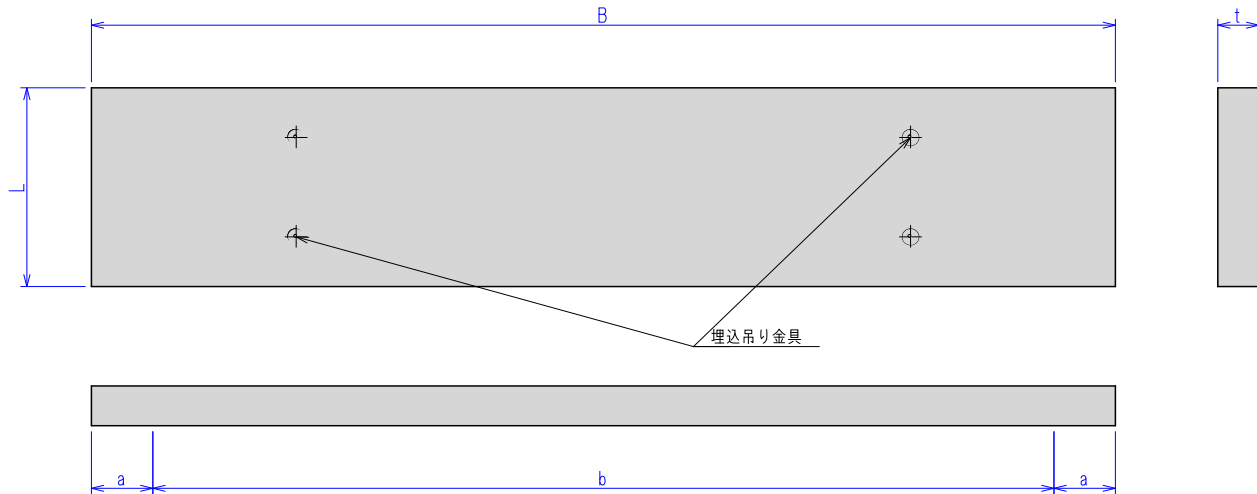

■寸法・重量 設計基準強度： $b \leq 1300 \sigma_{ck} = 30\text{N/mm}^2$ $b > 1300 \sigma_{ck} = 40\text{N/mm}^2$

サイズ			厚み		参考重量(kg)		設計条件			
全幅 B	溝幅 b	支承幅 a	T-25 ※2	T-25 ※1	T-25 ※1	T-25 ※1				
1300	1000	150	150	200	488	650	○溝蓋 後輪1輪荷重50KN ○床版 A、B活荷重			
1400	1100			220	525	700				
1500	1200			230	563	825				
1600	1300			250	600	880				
1700	1400	150	230	270	978	978	○溝蓋 後輪2輪荷重100KN ○床版 A、B活荷重			
1800	1500			1,035	1,035					
1900	1600			1,093	1,188					
2000	1700			1,150	1,250					
2100	1800			1,208	1,313					
2200	1900			1,265	1,485					
2400	2000			1,500	1,620					
2500	2100			1,563	1,688					
2600	2200	200	250	1,625	1,885	○床版 A、B活荷重				
2700	2300			1,688	1,958					
2800	2400			1,750	2,030					
2900	2500			1,813	2,103					
3000	2600	200	290	320	2,175	2,400	○床版 A、B活荷重			
3100	2700			2,248	2,480					
3200	2800			2,320	2,560					
3300	2900			2,393	2,640					
3500	3000			250	300	340		2,625	2,975	
3600	3100					2,700		3,060		
3700	3200					2,775		3,145		
3800	3300					2,850		3,420		
3900	3400			250	300	360		2,925	3,510	
4000	3500					3,000		3,600		
4100	3600					310		390	3,178	3,998
4200	3700								3,255	4,095
4300	3800	3,333	4,193							
4400	3900	3,410	4,290							
4500	4000	300	320	3,488	4,388	○床版 A、B活荷重				
4700	4100			410	3,760		4,818			
4800	4200			440	3,840		4,920			
4900	4300			460	3,920		5,023			
5000	4400			4,000	5,500					
5100	4500			4,080	5,610					
5200	4600			4,160	5,720					
5300	4700			4,240	5,830					
5400	4800	4,320	6,210							
5500	4900	4,400	6,325							

※1 (t寸法 道路橋示方書・同解説に準拠した規格)

※2 仮設用他道路橋示方書に準じない場合

その他 荷重条件、支承幅等条件に合わせて検討いたします。